



PNEUMATIC TOOLS

MADE IN JAPAN



VER. 2018-2

SAITAMA SEIKI CO. LTD., Saitama, Japan





INDEX -1-

PAGE	MODEL	DESCRIPTION	NOTE
1		IMPACT WRENCHES - 3/8", 1/2", 3/4" square drive	
	AK-135	3/8" Impact Wrench	single hammer
	AK-170T	1/2" Impact Wrench	twin hammer
	AK-150ST	1/2" Impact Wrench	single jumbo hammer
	AK-845	1/2" Impact Wrench	pin clutch
	AK-845L	1/2" Impact Wrench with 2.5" long anvil	pin clutch
	AK-156	3/4" Impact Wrench	pin clutch
2	AK-156L	3/4" Impact Wrench with 2.5" long anvil	pin clutch
		IMPACT WRENCHES - 1" square drive	
	AK-1350S	1" Straight Impact Wrench	pinless single hammer
	AK-1350	1" Straight Impact Wrench with 7.5" long anvil	pinless single hammer
	AK-145SS	1" Heavy duty Straight Impact Wrench	pinless single hammer
	AK-145S	1" Heavy duty Straight Impact Wrench with 9" long anvil	pinless single hammer
	AK-1350P	1" Pistol grip Impact Wrench	pinless single hammer
3	AK1350PL	1" Pistol grip Impact Wrench with 7.5" long anvil	pinless single hammer
		RATCHET WRENCHES - 1/4", 3/8", 1/2" square drive	
	AK-1900	3/8" Mini Ratchet Wrench	
	AK-1900A	1/4" Mini Ratchet Wrench	
	AK-1902	3/8" Mini Ratchet Wrench, rubber grip	U-GUIDE
	AK-1901	3/8" Mini Ratchet Wrench, speed regulator built-in	U-GUIDE
	AK-131	1/2" Standard Ratchet Wrench	
	AK-133	3/8" Standard Ratchet Wrench	
	AK-220	Through Ratchet Wrench, 8-14mm cap.	with 4 sockets
4	AK-225	Through Ratchet Wrench, 17-21mm cap.	with 3 sockets
		DRILLS, SCREWDRIVERS & IMPACT DRIVER	
	AK-590	3/8" Drill	
	AK-600	3/8" Reversible Drill	
	AK-527	1/2" Reversible Drill	
	AK-500AH	3/8" Angle Drill	
	AK-500AHR	3/8" Angle Reversible Drill	
	AK-825	Impact Driver	double hammer
	AK-810	Screwdriver	
5	AK-810-8	Low-speed Screwdriver	800 rpm
	AK-830	Straight Screwdriver	
		DIE GRINDERS	
	AK-125	1/4" Mini Die Grinder	
	AK-125AH	1/4" Angle Die Grinder	
	AK-130	1/4" Die Grinder	
	AK-130C	1/4" Die Grinder	rear exhaust
	AK-130D	1/4" Long Die Grinder	rear exhaust
	AK-1362	Micro Grinder	
	AK-1365	Pencil Grinder	
6	AK-1625R	Heavy Duty Die Grinder	rotary throttle
	AK-1625	Heavy Duty Die Grinder	lever throttle
	AK-1625RL	Heavy Duty Long Die Grinder	rotary throttle
	AK-1625L	Heavy Duty Long Die Grinder	lever throttle
		GRINDERS, SANDERS & LAPPER	
	AK-102GL	Mini Angle Grinder	with quick pad
	AK-102GR	Mini Angle Grinder	with quick pad
	AK-104SR/SL	4" Disc Sander/Grinder	
	AK-104GR/GL	4" Disc Grinder	
	AK-102CL	Mini Angle Grinder	with quick pad
	AK-AR07	Turbo Lapper	0.7mm stroke
	AK-5901	3" Paper Sander	
	AK-580	7" Angle Sander	



INDEX -2-

PAGE	MODEL	DESCRIPTION	NOTE
7		EXTRA DUTY ANGLE GRINDERS (rotary throttle or safety lever throttle)	
	AK-NAS4B	4" Angle Grinder	
	AK-NAS5B	5" Angle Grinder	
	AK-NAS7B	7" Angle Grinder	
8		EXTRA DUTY DIE GRINDERS (rotary throttle or safety lever throttle)	
		AK-NG25 (mini), AK-NG45 (small), AK-NG65A (medium), AK-NG65L (long), AK-NG75A (large), AK-NG75L (extra long)	
9		EXTRA DUTY STRAIGHT GRINDERS (rotary throttle or safety lever throttle)	
	AK-NG65C	2.5" Disc Grinder	
	AK-NG75C	3" Disc Grinder	
	AK-NG125A	5" Disc Grinder	
	AK-NG150A	6" Disc Grinder	
10		DOUBLE ACTION SANDERS	
	AK-51	1.2" Mini DA Sander	
	AK-52	Mini DA Sander	
	AK-54	4" DA Sander	
	AK-55	5" DA Sander	
	AK-56	6" DA Sander	
	AK-551	5" DA Sander	special pads
	AK-551S	5" DA Sander	special pads
	AK-556	5" Heavy Duty DA Sanderr	
11		DOUBLE ACTION SANDERS - DUST EXTRACTION	
	AK-54D	4" DA Sander, dust extraction	
	AK-55D	5" DA Sander, dust extraction	
	AK-56D	6" DA Sander, dust extraction	
	AK-551D	5" DA Sander, dust extraction	special pads
	AK-551SD	5" DA Sander, dust extraction	special pads
12		ORBITAL SANDERS, TIP SANDER, WET SANDERS & SPECIAL POLISHERS	
	AK-62	Orbital Sander	pad: 71x106mm
	AK-62D	Orbital Sander, dust extraction	pad: 71x106mm
	AK-64	Orbital Sander	pad: 71x145mm
	AK-64D	Orbital Sander, dust extraction	pad: 71x145mm
	AK-62W	Wet Orbital Sander	pad: 71x106mm
	AK-64W	Wet Orbital Sander	pad: 71x145mm
	AK-55P	Wax Polisher	pad: 123mm dia.
	AK-62P	Glass Polisher	pad: 71x106mm
	AK-625	Round Orbital Sander	pad: 123mm dia.
	AK-71	Tip Sander	pad: 40x86mm & options
13		POLISHERS & BELT SANDER	
	AK-83P	Mini Angle Polisher	side handle optional
	AK-83HP	Mini Angle Polisher	
	AK-53SP	Polishing Sander	
	AK-85V	Vertical Polisher/Sander	
	AK-102GP	High-speed Mini Polisher	
	AK-585	7" Angle Polisher	
	AK-113	Belt Sander	contact arm changeable



INDEX -3-

PAGE	MODEL	DESCRIPTION	NOTE
14		BELT SANDERS, AIR SAW, MINI BEVELLER, MINI GRINDERS	
	AK-110	10mm/12mm Belt Sander	
	AK-120	20mm Belt Sander	
	AK-310	Air Saw	
	AK-725S	Mini Beveller	
	AK-103GR	Mini Angle Grinder, rotary throttle	
	AK-103GL	Mini Angle Grinder, safety-lever throttle	
15	New Models	VARIOUS SANDERS, NYLON BRUSH	
	AK-55J	5"/6" Double Action Sander	10mm orbit dia.
	AK-55JD	5"/6" Double Action Sander, dust extraction	10mm orbit dia.
	AK-55JI	Dynamic Single Action Sander	10mm orbit dia.
	AK-803SB	Heavy Duty Brush Sander	
	AK-623	3" Round Pad Orbital Sander	3mm orbit dia.
	AK-73	Extra Long Pad Orbital Sander	3mm orbit dia.
	Y-BRUSH	New Nylon Abrasive Brush	
16	New Models	IMPACT WRENCHES, IMPACT SCREWDRIVERS, AIR TAPPER	
	AK-1320S	1" Light -weight Impact Wrench, short anvil	
	AK-1320	1" Light -weight Impact Wrench, long anvil	
	AK-S6	Heavy Duty 3/8" Impact Wrench	straight
	AK-S6L	Heavy Duty 1/4" Impact Screwdriver	straight
	AK-P6	Heavy Duty 3/8" Impact Wrench	pistol
	AK-P6L	Heavy Duty 1/4" Impact Screwdriver	pistol
	AK-10TP	Air Tapper	
	AK-601	3/8" Reversible Drill	



IMPACT WRENCHES - 3/8" 1/2" 3/4" Sq. Drive

APPLICATIONS

Disassembling the engines of cars and motorcycles. Tire changing. Disassembling and assembling construction machineries, and its maintenance.

● AK-135 3/8" (9.5mm) sq.drive

Single Hammer



● AK-150ST 1/2" (12.7mm) sq.drive




New Model


**LIGHTEST WEIGHT
&
MOST COMPACT**

COMPOSITE HOUSING

● AK-170T 1/2" (12.7mm) sq.drive



Twin Hammer



Jumbo Hammer


● AK-845 1/2" (12.7mm) sq.drive



Pin Clutch



● AK-845L AK-845 with 2" Long Anvil



Pin Clutch


● AK-156 3/4" (19mm) sq. drive



Pin Clutch



● AK-156L AK-156 with 2.5" Long Anvil



Pin Clutch

Model	Square Drive (mm)	Bolt Cap. (mm)	Max. Torque (N·m)	Air Cons. (L/min.) (no load)	Air Cons. (L/min.) (load)	Free Speed (rpm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)
AK-135	9.5	10	100	380	320	9,000	1/4	1.33	136
AK-150ST	12.7	16	470	340	480	9,500	1/4	1.15	112
AK-170T	12.7	16	500	530	380	7,000	1/4	2.2	195
AK-845	12.7	16	450	480	350	7,000	1/4	2.26	187
AK-845L	12.7	16	450	480	350	7,000	1/4	2.35	225
AK-156	19	25	900	680	400	5,300	1/4	3.7	215
AK-156L	19	25	900	680	400	5,300	1/4	3.8	253



IMPACT WRENCHES - 1" Sq. Drive, straight & pistol

APPLICATIONS

The changing for heavy vehicles. Disassembling and assembling heavy duty construction machineries and its maintenance. Construction and maintenance of railways, bridge, buildings, highway and oil plants.

● **AK-1350S** 1" (25.4mm) sq.drive
short anvil



Single Pinless

● **AK-1350** 1" (25.4mm) sq.drive
with 7.5" long anvil



Single Pinless

● **AK-145SS** 1" (25.4mm) sq.drive
with short anvil




Single Pinless

● **AK-145S** 1" (25.4mm) sq.drive
with 9" long anvil




Single Pinless

● **AK-1350P** 1" (25.4mm) sq.drive
short anvil

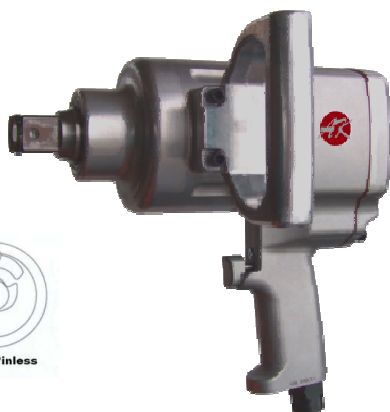


Single Pinless

● **AK-1350PL** 1" (25.4mm) sq.drive
with 7.5" long anvil

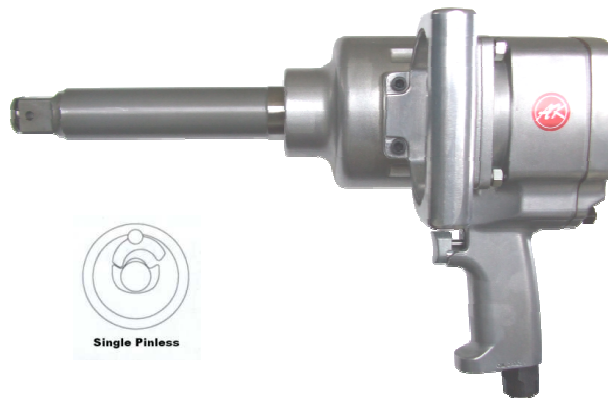


Single Pinless

**SPECIALLY STRONG
ANVIL for
AK 1" Impact Wrenches**



Conventional anvil
without "RIB"



Improved anvil
with "RIB"

Improved anvil with
"RIB"
increases the strength of
hammer components
by 30%, which makes



INSIDE trigger
for AK-1350S/AK-1350/
AK-145SS/AK-145S
is also available.

Model	Square Drive (mm)	Bolt Cap. (mm)	Max. Torque (N·m)	Air Cons. (L/min.) (no load) (load)	Free Speed (rpm)	Air Inlet (inch PT)	Weight (kg)	Length (mm)
AK-1350S	25.4	38	2,000	1,280 1,000	3,500	1/2	9.3	360
AK-1350	25.4	38	2,000	1,280 1,000	3,500	1/2	10.8	510
AK-145SS	25.4	45	2,500	1,480 1,200	3,200	1/2	12.3	410
AK-145S	25.4	45	2,500	1,480 1,200	3,200	1/2	14.8	560
AK-1350P	25.4	38	2,500	1,280 1,000	3,500	1/2	9.6	270
AK-1350PL	25.4	38	2,500	1,280 1,000	3,500	1/2	11.1	420



RATCHET WRENCHES - 1/4" 3/8" 1/2" Sq. Drive & Through

APPLICATIONS

Fasten/unfasten the screws of car engine and other automotive repairing and maintenance as well as various industrial operations at confined areas.

- **AK-1900** 3/8" (9.5mm) sq.drive
- **AK-1900A** 1/4" (6.35mm) sq.drive
Mini Ratchet



- **AK-1901** 3/8" (9.5mm) sq.drive
"U-GUIDE" Mini Ratchet



- **AK-131** 1/2" (12.7mm) sq.drive
- **AK-133** 3/8" (9.5mm) sq.drive
Standard Ratchet



- **AK-220** Through Ratchet (S)



- **AK-225** Through Ratchet (L)



- **AK-1902** 3/8" (9.5mm) sq.drive
"U-GUIDE" Mini Ratchet



U-GUIDE device for AK-1901 & AK-1902



U-GUIDE York

Conventional

- +Solution to the structural problem of ratchet.
- +Special finish made on York teeth (US patent).
- +Minimum slippage of Anvil Shank and York.
- +Minimum wearing of York teeth and Anvil Shank.
- +Stability of torque and rotation.
- +Minimize the damages of screws.
- +Additional fastening by hand is available.

WORN
anvil



NEW
anvil

3-step SPEED REGULATOR for AK-1901

grooves speed

- 1 : Stop
- 2 : Low speed
- 3 : Midium speed
- 4 : High speed



- air exhaust direction is variable at 360 degrees.

Model	Sq./Hex. Drive (mm)	Drive Speed no load (rpm)	Torque (N·m)	Air Cons. (L/min)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)
AK-1900	9.5	250	20	350	1/4	0.5	165
AK-1900A	6.35	250	20	350	1/4	0.5	165
AK-1901	9.5	250	20	350	1/4	0.63	192
AK-1902	9.5	250	20	350	1/4	0.5	165
AK-133	9.5	160	80	450	1/4	1.16	263
AK-131	12.7	160	80	450	1/4	1.16	263
AK-220	8,10,12,14	450	30	350	1/4	0.58	210
AK-225	17,19,21	350	30	250	1/4	0.8	250



DRILLS, SCREWDRIVERS & IMPACT DRIVERS

APPLICATIONS

DRILLS: metal working, wooden working, automotive repairing and maintenance, and every drilling work.

IMPACT DRIVER: Assembling operations for wooden, electric and other products.

● AK-590 3/8" Drill



● AK-825 Impact Driver



● AK-600 3/8" Reversible Drill



● AK-810 Screw Driver



● AK-527 1/2" Reversible Drill



● AK-810-8 Low-speed Screwdriver



● AK-500AH 3/8" Angle Drill



● AK-830 Straight Screwdriver




● AK-500AHR 3/8" Angle Reversible Drill



TORQUE ADJUSTMENT for SCREWDRIVERS

1. Disassemble Housing.
2. Use two wrenches from the box.
3. Adjust torque as shown.



Model	Chuck cap. (mm)	Speed no load (rpm)	Air Cons. (L/min)	Air Inlet (inch PT)	Hex.drive (mm)	Screw cap. (mm)	Torque (N·m)	Net Weight (kg)	Length (mm)
AK-590	10	2,400	470	1/4	-	-	-	1.18	178
AK-600	10	2,000	580	1/4	-	-	-	1.18	178
AK-527	13	480	470	1/4	-	-	-	1.6	220
AK-500AH	10	1,900	360	1/4	-	-	-	0.98	185
AK-500AHR	10	1,200	360	1/4	-	-	-	1.27	208
AK-825	-	12,000	350	1/4	6.35	6	50	0.87	125
AK-810	-	1,800	600	1/4	6.35	6	12	1.16	205
AK-810-8	-	800	600	1/4	6.35	8	15	1.35	205
AK-830	-	1,800	420	1/4	6.35	6	12	1.15	250



DIE GRINDERS

APPLICATIONS

Removal of die cast chips, welding spot, rust, etc. Any metal grinding. Tire repairing. Chamfering.

● **AK-125** 1/4" Mini Die Grinder



● **AK-1362** Micro Grinder



● **AK-125AH** 1/4" Angle Die Grinder



● **AK-1635** Pencil Grinder



● **AK-130** 1/4" Die Grinder



● **AK-1625R** Heavy Duty Die Grinder, rotary

● **AK-1625** Heavy Duty Die Grinder, lever



● **AK-130C** 1/4" Die Grinder



● **AK-1625RL** Heavy Duty Long Die Grinder, rotary

● **AK-1625L** Heavy Duty Long Die Grinder, lever

● **AK-130D** 1/4" Long Die Grinder



Model	Collet size (mm)	Speed no load (rpm)	Air Cons. (L/min)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-125	6	27,000	380	1/4	0.3	120	86
AK-125AH	6	20,000	380	1/4	0.42	123	86
AK-130	6	24,000	550	1/4	0.53	143	85
AK-130C	6	22,000	450	1/4	0.57	168	91
AK-130D	6	4,500	450	1/4	0.73	200	91
AK-1362	3	56,000	170	1/4	0.24(w/hose)	135	80
AK-1635	3 / 6	35,000	180	1/4	0.24	146	75
AK-1625R	6	25,000	300	1/4	0.62	180	86
AK-1625	6	25,000	300	1/4	0.6	163	86
AK-1625RL	6	25,000	300	1/4	0.95	335	85
AK-1625L	6	25,000	300	1/4	0.93	318	85



GRINDERS & SANDERS

APPLICATIONS

Paint scraping. Rust removal.

● AK-102GL

Mini Angle Grinder



● AK-102CL

Mini Angle Grinder



● AK-102GR

Mini Angle Grinder



● AK-AR07

Turbo Lapper



● AK-104SR

4" Disc Sander/Grinder

LEVER throttle is also available.
[Model AK-104SL]



● AK-5901

3" Paper Sander



● AK-104GR

4" Disc Grinder

LEVER throttle is also available.
[Model AK-104GL]



● AK-580

7" Angle Sander



Model	Disc/Paper Size (mm)	Speed no load (rpm)	Air Cons. (L/min)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-102GL	50	22,000	400	1/4	0.53	135	80
AK-102GR	50	22,000	400	1/4	0.51	145	80
AK-104SR/SL	100	13,000	530	1/4	0.9	180	90
AK-104GR/GL	100	12,000	680	1/4	1.3	207	92
AK-102CL	collet 6	22,000	400	1/4	0.5	135	80
AK-AR07	3	35,000	46	1/4	0.19	180	78
AK-5901	100	18,000	400	1/4	0.95	107	90
AK-580	175	4,800	630	1/4	2.05	325	95



EXTRA HEAVY DUTY ANGLE GRINDERS

- for grinding wheels, diamond cutting wheels & wire cup brushes -

APPLICATIONS

welding spot grinding, paint scraping, rust removal, chamfering, deburring, & any heavy duty grinding and cutting.

AK-NAS4B

AK-NAS4B(R) ROTARY THROTTLE

AK-NAS4B(S) SAFETY LEVER THROTTLE

4" DISC GRINDER

4" DIAMOND CUTTER



SAFETY LEVER
(available for all models)



Water Grinding (optional)

AK-NAS5B

AK-NAS5B(R) ROTARY THROTTLE

AK-NAS5B(S) SAFETY LEVER THROTTLE

5" DISC GRINDER

5" DIAMOND CUTTER

5" DIAMOND CUTTER
without DEAD HANDLE



AK-NAS7B

AK-NAS7B(R) ROTARY THROTTLE

AK-NAS7B(S) SAFETY LEVER THROTTLE

7" ANGLE GRINDER

7" DIAMOND CUTTER



● 9" ANGLE GRINDER is also available
[AK-NAS9B]

Model	Grinding Wheel Size (mm)	Cutting Wheel Size (mm)	Wire Cup Brush (Bevel) Size (mm)	Air Cons. (L/min)	Free Speed (rpm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)
AK-NAS4B	100x6x15/16	105x2x20	50/6/75(100)x16	750	13,000	1/2	1.7	215
AK-NAS5B	125x6x22	125x2x20	90(120)x16	800	10,500	1/2	1.8	219
AK-NAS7B	180x6x22	180x2x25.4	120(165)x22	1200	7,000	1/2	3.6	275

☆ 8"(205mm) wheel cover for AK-NAS7B is available upon request.



EXTRA HEAVY DUTY DIE GRINDERS

APPLICATIONS

Deburring and finishing of die cast mould. Steel and stone grinding.

● AK-NG25

AK-NG25 (R)

rotary switch



AK-NG25 (S)

safety lever switch



● AK-NG45

AK-NG45 (R)

rotary switch



AK-NG45 (S)

safety lever switch



● AK-NG65A

AK-NG65A (R)

rotary switch



AK-NG65A (S)

safety lever switch



● AK-NG65L

AK-NG65L (R)

rotary switch



AK-NG65L (S)

safety lever switch



● AK-NG75A

AK-NG75A (R)

rotary switch



AK-NG75A (S)

safety lever switch



● AK-NG75L

AK-NG75L (R)

rotary switch



AK-NG75L (S)

safety lever switch



Model	Wheel Size (mm)	Collet Size (mm)	Air Cons. (L/min)	Free Speed (rpm)	Air Inlet (inch PT)	Weight (kg)	Overall Length (mm)
AK-NG25 (R)/(S)	25	3 or 6 or 1/4"	400	24,000	3/8	0.7/0.6	179/169
AK-NG45 (R)/(S)	25	3 or 6 or 1/4"	400	20,000	3/8	0.7/0.6	167/157
AK-NG65A (R)/(S)	25	6 or 1/4"	500	16,000	3/8	1.2/1.25	310/365
AK-NG65L (R)/(S)	25	6 or 1/4"	500	16,000	3/8	1.35/1.4	370/425
AK-NG75A (R)/(S)	25	6 or 1/4"	600	15,000	3/8	1.35/1.4	310/365
AK-NG75L (R)/(S)	25	6 or 1/4"	600	15,000	3/8	2.35/2.4	515/570



EXTRA HEAVY DUTY STRAIGHT GRINDERS

APPLICATIONS

Deburring and finishing of die cast mould. Steel and stone grinding.

● AK-NG65C

AK-NG65C (R)

rotary switch



AK-NG65C (S)

safety lever switch



● AK-NG75C

AK-NG75C (R)

rotary switch



AK-NG75C (S)

safety lever switch



● AK-NG125A

AK-NG125A (R)

rotary switch



AK-NG125A (S)

safety lever switch



● AK-NG150A

AK-NG150A (R)

rotary switch



AK-NG150A (S)

safety lever switch



Model	Wheel Size (mm)	Air Cons. (L/min)	Free Speed (rpm)	Air Inlet (inch PT)	Weight (kg)	Overall Length (mm)
AK-NG65C (R)/(S)	65x13x9.5	500	14,600	3/8	1.3/1.35	280/335
AK-NG75C (R)/(S)	75x13x9.5	600	12,700	3/8	1.45/1.5	280/335
AK-NG125A (R)/(S)	125x19x12.7	1200	7,600	1/2	3.1	395/430
AK-NG150A (R)/(S)	150x25x15.9	1250	6,300	1/2	4.4	445/490



DOUBLE ACTION SANDERS

APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. with AK-TOOL's excellent sanding program. Tools are of low vibration, low gravity center, well-balanced.

●AK-51

1.2" Mini Double Action Sander



●AK-52

Mini Double Action Sander



●AK-54

4" Double Action Sander



●AK-55

5" Double Action Sander



●AK-551

5" Double Action Sander

[Model:AK-551S]



with one body pad

●AK-56

6" Double Action Sander



●Special pads for AK-551


Velcro Pad Base (105mm)



Velcro Hard Pad 123mm



Velcro Soft Pad 123mm



●AK-556

5" Double Action Sander



Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-51	30	8,500	3	140	-	1/4	0.48	175	75
AK-52	45/72	10,000	3	280	5/16-24UNF	1/4	0.71	198	83
AK-54	98	9,000	5	340	5/16-24UNF	1/4	0.7	165	78
AK-551	123	9,000	5	340	5/16-24UNF	1/4	0.69	175	78
AK-551S	123	9,000	5	340	5/16-24UNF	1/4	0.69	175	78
AK-55	123	10,000	5	380	5/16-24UNF	1/4	0.9	175	78
AK-56	148	10,000	5	380	5/16-24UNF	1/4	0.9	185	78
AK-556	123	11,000	6	400	5/16-24UNF	1/4	1.7	265	80



DOUBLE ACTION SANDERS - dust extraction

APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. with AK-TOOL's excellent sanding program. Tools are of low vibration, low gravity center, well-balanced.

● AK-54D

4" Double Action Sander



● AK-55D

5" Double Action Sander



● AK-551D

5" Double Action Sander






● AK-56D

6" Double Action Sander



● AK-551SD

5" Double Action Sander

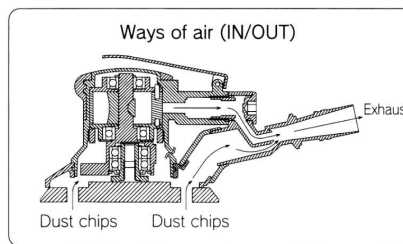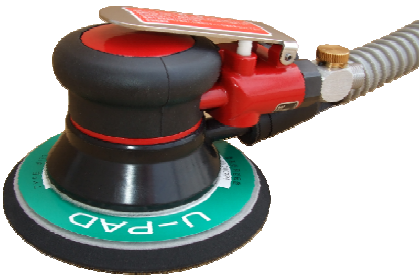

● Holes positions of pads

98mm dia.	123mm dia.	148mm dia.	148mm dia.	148mm dia.

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-54D	98	8,500	5	340	5/16-24UNF	1/4	0.73	213	78
AK-551D/551SD	123	8,500	5	340	5/16-24UNF	1/4	0.75	225	78
AK-55D	123	8,500	5	380	5/16-24UNF	1/4	0.96	225	78
AK-56D	148	8,500	5	380	5/16-24UNF	1/4	0.96	237	78



ORBITAL SANDERS, TIP SANDER & WET SANDERS

APPLICATIONS

Widely used at various industries of car body repairing, wooden working, metal working, FRP working, etc. High efficiency by strong motor, low vibration and low gravity center. Less fatigue by well-balanced ergonomical design.

● **AK-62** Orbital Sander



● **AK-62D** Dust Free Orbital Sander



● **AK-64** Orbital Sander



● **AK-64D** Dust Free Orbital Sander



● **AK-62W** Wet Orbital Sander



● **AK-55P** Wax Polisher



● **AK-64W** Wet Orbital Sander



● **AK-62P** Glass Polisher



● **AK-71** Tip Sander



● **AK-625** Orbital Sander



Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-62	71x106	8,500	3	340	-	1/4	0.74	165	78
AK-64	71x145	8,500	3	340	-	1/4	0.76	185	78
AK-62W	71x106	8,500	3	340	-	1/4	0.78	165	78
AK-64W	71x145	8,500	3	340	-	1/4	0.8	185	78
AK-71	40x86	10,000	3	280	-	1/4	0.71	245	83
AK-62D	71x106	8,500	3	340	-	1/4	0.8	215	78
AK-64D	71x145	8,500	3	340	-	1/4	0.82	265	78
AK-55P	123	8,500	5	340	5/16-24UNF	1/4	0.92	172	78
AK-62P	71x106	8,500	3	340	-	1/4	0.74	165	78
AK-625	123	8,500	3	340	-	1/4	0.74	172	78



POLISHERS & BELT SANDER

APPLICATIONS

POLISHERS: Polishing and finishing on paint-coated surface.

BELT SANDERS: Grinding and sanding the welding spot. Chamfering

● AK-83P

Mini Angle Polisher



Side Handle (optional)



● AK-83HP

Mini Angle Polisher



● AK-53SP

Polishing Sander



● AK-85V

Vertical Sander/Polisher



● AK-102GP

High-speed Mini Polisher



● AK-585

Angle Polisher



● AK-113

Belt Sander



● Contact Arms for AK-113

Arm A:
10/12mm x 330mm
(standard)



Arm B:
3mm x 330mm
(optional)



Arm C:
10/12mm x 330mm
(optional)



Arm C:
18mm x 330mm
(optional)



- Large contact wheel -

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-83P	72	2,500	-	350	5/16-24UNF	1/4	0.7	185	84
AK-83HP	72	3,500	-	380	5/16-24UNF	1/4	0.78	205	88
AK-53SP	72/85	10,000	12	380	5/16-24UNF	1/4	0.94	120	78
AK-85V	123	3,000	-	450	5/16-24UNF	1/4	1.14	232	82
AK-102GP	45	22,000	-	400	6 mm	1/4	0.49	135	80
AK-585	175	2,400	-	630	W/5/8-11	1/4	2.05	325	95
AK-113	10/12x330	18,000	-	380	-	1/4	0.86	285	85



BELT SANDERS, AIR SAW, BEVELLER & GRINDERS

APPLICATIONS

BELT SANDERS: Grinding and sanding the welding spot. Chamfering.

AIR SAW: Cutting metal, FRP, plastics, wood, etc.

MINI BEVELLER: Chamfering & deburring small screw holes & oval holes.

MINI ANGLE GRINDERS: Chamfering & deburring after die-cast moulding.
FRP, wood and metal working.

● AK-110 10mm/12mm Belt Sander



● AK-120 20mm Belt Sander



● AK-310 Air Saw



● AK-725S Mini Beveller



● AK-103GR/GL 2" Mini Angle Disc Grinder, rotary/safety-lever throttle



Model	Disc Size (mm)	Belt Size (mm)	Nos of strokes (bpm)	Piston stroke (mm)	Speed (no load) rpm	Air Cons. (L/min)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)
AK-110	-	10/12x330	-	-	17,000	450	1/4	0.93	315
AK-120	-	20x520	-	-	17,000	450	1/4	1.4	385
AK-310	-	-	9000	10	-	150	1/4	0.64	236
AK-103GR	50	-	-	-	12,500	540	1/4	0.54	160
AK-103GL	50	-	-	-	12,500	540	1/4	0.59	160
	Bevelling Capacity (mm)		Minimum Hole dia. (mm)						
AK-725S	Max. 1.5C		6.8		-	450	1/4	0.4	112



VARIOUS SANDERS, NYLON BRUSH

APPLICATIONS

Various sanding works for car body, baked paint, FRP, heavy vehicles, steel material, rust removal, die cast mould, & etc. Tools are of low vibration, low gravity center, well-balanced.

● **AK-55J** 5"/6" Double Action Sander



● **AK-55JD** with dust extraction



● **AK-55JI** Dynamic Single Action Sander




● **AK-803SB** Heavy Duty Brush Sander



● **AK-623** 3" Round Pad Orbital Sander




● **AK-73** Extra Long Pad Orbital Sander

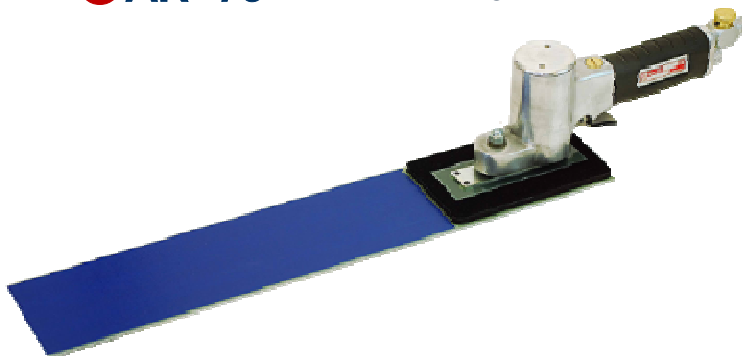

● **Y-BRUSH**

New Nylon Abrasive Brush (for sanding any restricted area)

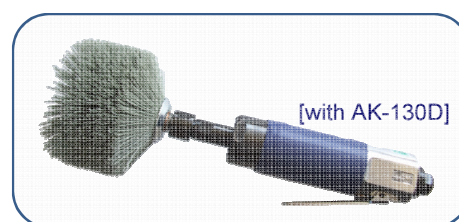

NOTE)

Y-BRUSH to be used under 5000 rpm

Model	Pad Size (mm)	Speed (no load) rpm	Orbit Dia. (mm)	Air Cons. (L/min)	Pad Screw Size (mm)	Air Inlet (inch PT)	Net Weight (kg)	Length (mm)	Noise Level (dBA)
AK-55J	123/148	9,000	10	350	5/16-24UNF	1/4	1	155(5")/165(6"	83
AK-55JD	123/148	9,000	10	350	5/16-24UNF	1/4	1.07	190(5")/200(6"	83
AK-55JI	123	10,000	10	350	5/16-24UNF	1/4	1.13	300	83
AK-803SB	75	5,000	-	460	M16(brush)	1/4	1.2	205	84
AK-623	72	8,500	3	340	5/16-24UNF	1/4	0.74	150	83
AK-73	78x400	8,000	3	260	-	1/4	0.79	453	88

Y-BRUSH Y-240: grit no.240 (equiv. to abrasive paper no. Y-320: grit no.320 (equiv. to abrasive paper no.600)



IMPACT WRENCHES, SCREWDRIVERS, TAPPER

APPLICATIONS

Any fastening works for automobiles, building road bridge construction, machineries, metal working, wood working, FRP, electric & electronics, furnitures, etc.

● **AK-1320S**(SHORT ANVIL) ▪ **AK-1320**(LONG ANVIL)

1" sq.drive Light-weight Impact wrench with 2" short anvil or 7.5" long anvil



● **AK-S6** 3/8" Impact Wrench



● **AK-S6L** 1/4" Impact Screwdriver



● **AK-P6** 3/8" Impact Wrench



● **AK-P6L** 1/4" Impact Screwdriver



● **AK-10TP** Air Tapper



● **AK-601** 3/8" Reversible Drill



Model	Square Drive (mm)	Bolt Cap. (mm)	Torque (N·m)	Air Cons. (L/min.)		Speed (rpm)	Air Inlet (inch PT)	Weight (kg)	Length (mm)
AK-1320S	25.4	38	2,000 (max)	1,280	1,000	4,100	3/8	7	360
AK-1320	25.4	38	2,000 (max)	1,280	1,000	4,100	3/8	7.8	510
AK-S6	9.5	6 - 8	50 -122	310	-	7,800	1/4	1.35	208
AK-P6	9.5	6 - 8	50 -122	340	-	7,000	1/4	1.5	140
Model	Screw Capacity (mm)				Air Cons.				
	standard	tapping	wood	bolt	(L/min)				
AK-S6L	6 - 8	4 - 4.5	3.5 - 4.5	6 - 8	310		8,000	1/4	1.33
AK-P6L	6 - 8	4 - 4.5	3.5 - 4.5	6 - 8	340		7,600	1/4	1.47
Chuck Capacity (mm)									
AK-10TP			10		420		2,400	1/4	1.1
AK-601			10		470		2,400	1/4	0.68



SAITAMA SEIKI CO., LTD.

2942 Mishiri, Kumagaya, Saitama, Japan

Tel. +81-482-532-3804

Fax +81-482-533-3883

web site: www.saitama-seiki.co.jp